

Type: 93H01 IS5406C (English)

LOCK 93H01 IS5406C


Characteristics:

- Multipoint mortise lock for wooden doors with 3 locking points,
- Backset 50mm, axe 85mm .
- 4 bolts in the central deadbolt, 3 in the up& down. 20mm projection with 2 key turns
- Front plate in steel 1.5mm thick, two-coating gold finish
- Dimension of the front plate: height 2030mm with U-shaped geometry (20x7.5mm),
- Strike plate 40mm width in steel, with two-coating gold finish
- High resistance to corrosion.
- Security cylinder 70mm, ref. C253535L brass, with anti-drilling protection. Certified according to EN1303 Standard
- Protective shield ref. 6100 gold plated.
- Comply with EN12209:2017
 1. Category of Use: 1
 2. Durability: A (> 50.000 cycles)
 3. Door Mass and Closing Force: 1
 4. Suitability for use on Fire Doors: 0
 5. Safety: 0
 6. Corrosion Resistance: 0
 7. Security and Drill Resistance. 1
 8. Type of Key and Locking: B

USES

- Mortise lock for wooden doors. Max. door dimensions
- 1300x2500mm and 100 kg weight.
- Lock designed for use with spring-loaded handles.
- Gap between frame and door 3 mm

Dimensions:

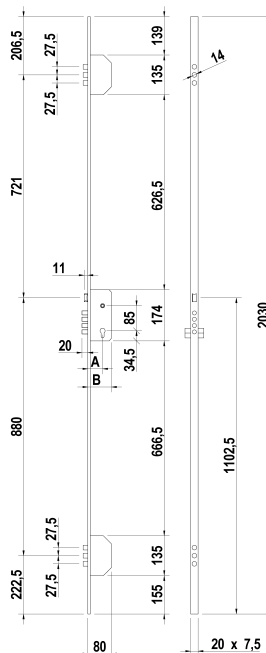




La Industrial Cerrajera SA (LINCE)
 Urkizuaran, 10
 48230 Elorrio
 BIZKAIA (ESPAÑA)

UNE-EN 12209:2004 (ES5454:2020)	1	A	1	0	0	0	1	B
1239	100956-003-a/22							


Modelos: 93H01 IS5406C

La cerradura debe instalarse en hojas de puerta que no superen una masa de 100 kg, una altura de 2.500 mm y una anchura de 1.300 mm.
 The lock must be installed indoors of 100 kg maximum, height 2.500mm and 1.300 width.

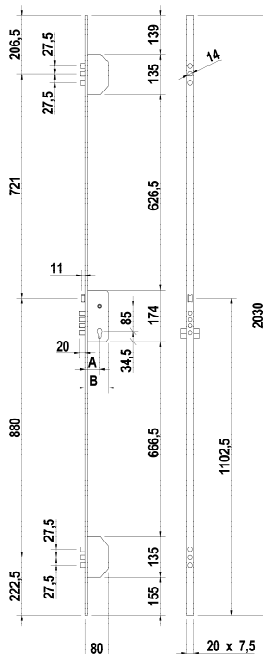


IMPORTANTE: con objeto de lograr un funcionamiento correcto, es necesario engrasar las partes móviles (picaporte, punto central, etc.) durante el montaje, y posteriormente cada 20.000 ciclos y al menos una vez por año.

IMPORTANT: in order to guaranty a correct use, it is compulsory to lubricate the driving parts (latch, central latch, etc.) while assembling, and afterwards every 20.000 cycles and at least once per year.



Holgura entre marco y puerta.
 Gap between frame and door

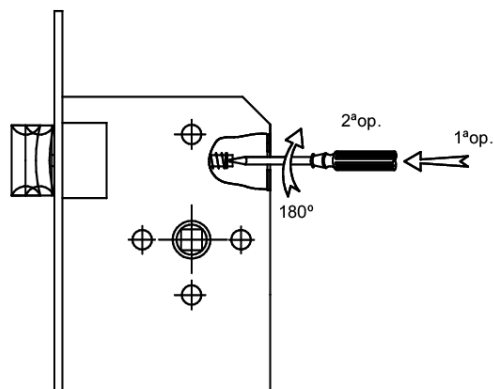

Reversibilidad picaporte.
 Latch reversibility